


## INSTALLATION CLEARANCES

# PYRO CLASSIC INSTALLED IN AN ALCOVE

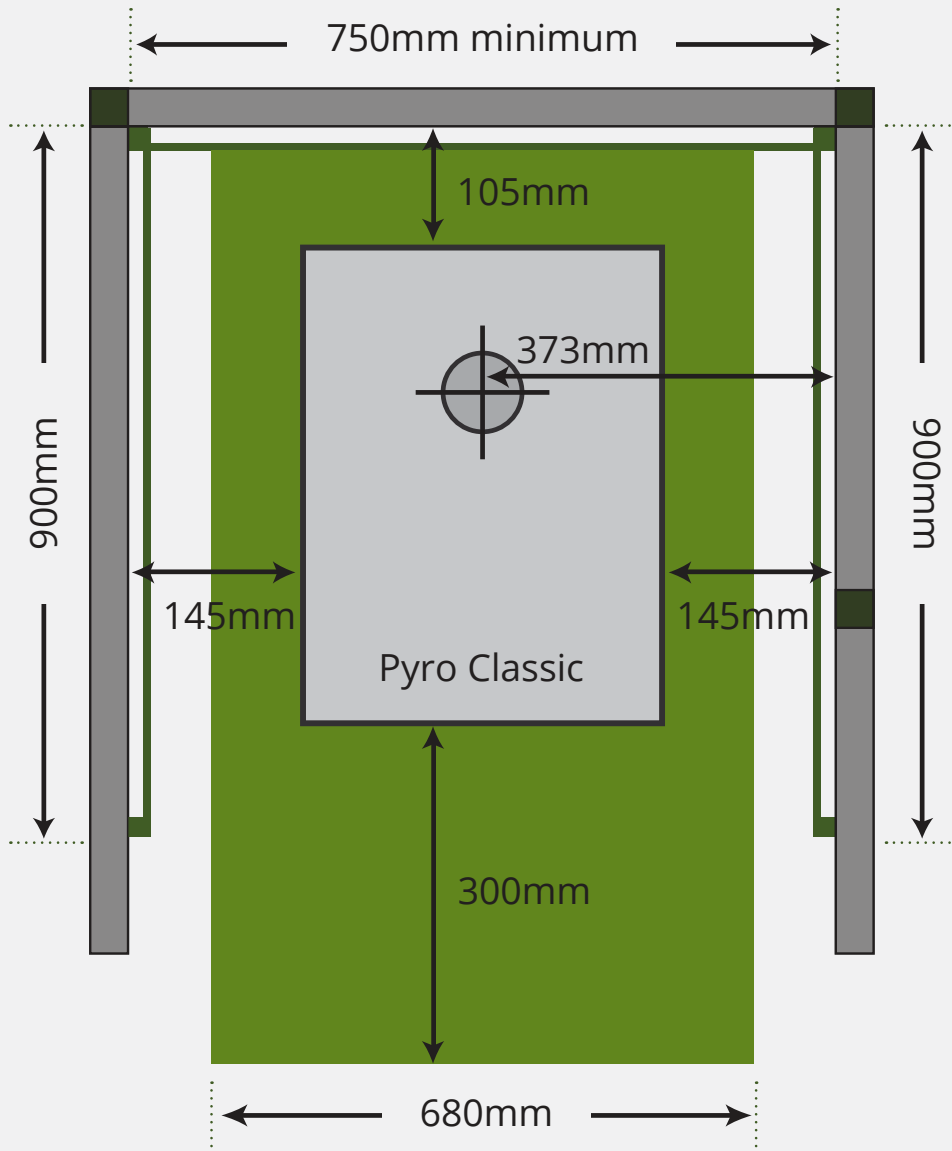

Side screens will only need to protect the combustible lengths of the built wall up to **900mm**. If wall is shorter, the screen will be shorter.

The small Raised Woodbin requires a **minimum of 4mm** thick non-combustible material installed underneath to meet all the necessary clearances e.g. tiles or steel.

N.B. All dimensions are minimums. Diagram not to scale.